

Hot electrons in low-dimensional phonon systems

S.-X. Qu,¹ A. N. Cleland,² and M. R. Geller¹

¹*Department of Physics and Astronomy, University of Georgia, Athens, Georgia 30602-2451 and*

²*Department of Physics, University of California, Santa Barbara, California 93106*

(Dated: March 15, 2005)

A simple bulk model of electron-phonon coupling in metals has been surprisingly successful in explaining experiments on metal films that actually involve surface- or other low-dimensional phonons. However, by an exact application of this standard model to a semi-infinite substrate with a free surface, making use of the actual vibrational modes of the substrate, we show that such agreement is fortuitous, and that the model actually predicts a low-temperature crossover from the familiar T^5 temperature dependence to a stronger $T^6 \log T$ scaling. Comparison with existing experiments suggests a widespread breakdown of the standard model of electron-phonon thermalization in metals.

PACS numbers: 63.22.+m, 85.85.+j

The coupling between electrons and phonons plays a crucial role in determining the thermal properties of nanostructures. The widely used “standard” model of low temperature electron-phonon thermal coupling and hot-electron effects in bulk metals [1, 2] assumes (i) a clean three-dimensional free-electron gas with a spherical Fermi surface, rapidly equilibrated to a temperature T_{el} ; (ii) a continuum description of the acoustic phonons, which have a temperature T_{ph} ; (iii) a negligible Kapitza-like thermal boundary resistance [3] between the metal and any surrounding dielectric, an assumption that is often well justified experimentally; and (iv), a deformation-potential electron-phonon coupling, expected to be the dominant interaction at long-wavelengths. In a bulk metal, the net rate P of thermal energy transfer between the electron and phonon subsystems is [2]

$$P = \Sigma V_{\text{el}} (T_{\text{el}}^5 - T_{\text{ph}}^5), \quad (1)$$

where V_{el} is the volume of the metal, and

$$\Sigma \equiv \frac{8 \zeta(5) k_B^5 \epsilon_F^2 N_{\text{el}}(\epsilon_F)}{3 \pi \hbar^4 \rho v_F v_1^4}. \quad (2)$$

Here ζ is the Riemann zeta function, ϵ_F is the Fermi energy, N_{el} is the electronic density of states (DOS) per unit volume, ρ is the mass density, v_1 is the bulk longitudinal sound speed, and v_F is the Fermi velocity.

This model, which has no adjustable parameters, has successfully explained some experiments [2, 4, 5], but others report a power-law temperature dependence with smaller exponents [6, 7], indicating an enhanced electron-phonon coupling at low temperatures. However, the experiments typically involve heating measurements in thin metal films deposited on semiconducting or insulating substrates, and the relevant phonons at low temperature are strongly modified by the exposed stress-free surface. An attempt to directly probe such phonon-dimensionality effects was carried out by DiTusa *et al.* [7], who intentionally suspended some of their samples, necessarily modifying the vibrational spectrum, although

they found no significant difference from their supported films. We argue that the paradox reported in Ref. [7] is actually quite widespread, and all experiments known to us on supported films actually contradict the standard model when that model is modified to account for the actual vibrational modes present in a realistic supported-film geometry, illustrated in Fig. 1. Our results have important implications for the thermal properties of mesoscopic and low-dimensional phonon systems and the use of such systems as nanoscale thermometers, bolometers, and calorimeters [8, 9, 10].

The Hamiltonian we consider (suppressing spin) is $H = \sum_{\mathbf{k}} \epsilon_{\mathbf{k}} c_{\mathbf{k}}^\dagger c_{\mathbf{k}} + \sum_n \hbar \omega_n a_n^\dagger a_n + \delta H$, where $c_{\mathbf{k}}^\dagger$ and $c_{\mathbf{k}}$ are electron creation and annihilation operators, with $\mathbf{k}$ the momentum, and $a_n^\dagger$ and a_n are bosonic phonon creation and annihilation operators. The vibrational modes, labeled by an index n , are eigenfunctions of the continuum elasticity equation $v_t^2 \nabla \times \nabla \times \mathbf{u} - v_l^2 \nabla (\nabla \cdot \mathbf{u}) = \omega^2 \mathbf{u}$ for linear isotropic media, along with accompanying boundary conditions. v_t and v_l are the bulk transverse and longitudinal sound velocities. $\delta H \equiv \frac{2}{3} \epsilon_F \int_{V_{\text{el}}} d^3 r \psi^\dagger \psi \nabla \cdot \mathbf{u}$ is the deformation-potential electron-phonon interaction, with $\mathbf{u}(\mathbf{r}) = \sum_n (2\rho\omega_n)^{-\frac{1}{2}} [\mathbf{f}_n(\mathbf{r}) a_n + \mathbf{f}_n^*(\mathbf{r}) a_n^\dagger]$ the quantized displacement field. The vibrational eigenfunctions $\mathbf{f}_n(\mathbf{r})$ are defined to be solutions of the elasticity field equations, normalized over the phonon volume V_{ph} according to $\int_{V_{\text{ph}}} d^3 r \mathbf{f}_n^* \cdot \mathbf{f}_{n'} = \delta_{nn'}$. It will be convenient to rewrite the electron-phonon interaction as $\delta H = \sum_{\mathbf{k}\mathbf{q}n} [g_{n\mathbf{q}} c_{\mathbf{k}+\mathbf{q}}^\dagger c_{\mathbf{k}} a_n + g_{n\mathbf{q}}^* c_{\mathbf{k}-\mathbf{q}}^\dagger c_{\mathbf{k}} a_n^\dagger]$, with coupling constant $g_{n\mathbf{q}} \equiv \frac{2}{3} \epsilon_F (2\rho\omega_n)^{-\frac{1}{2}} V_{\text{el}}^{-1} \int_{V_{\text{el}}} d^3 r \nabla \cdot \mathbf{f}_n e^{-i\mathbf{q} \cdot \mathbf{r}}$. Note that we allow for different electron and phonon volumes.

The quantity we calculate is the thermal energy per unit time transferred from the electrons to the phonons,

$$P \equiv 2 \sum_{\mathbf{k}\mathbf{q}n} \hbar \omega_n [\Gamma_n^{\text{em}}(\mathbf{k} \rightarrow \mathbf{k} - \mathbf{q}) - \Gamma_n^{\text{ab}}(\mathbf{k} \rightarrow \mathbf{k} + \mathbf{q})], \quad (3)$$

where

$$\Gamma_n^{\text{em}}(\mathbf{k} \rightarrow \mathbf{k} - \mathbf{q}) = 2\pi |g_{n\mathbf{q}}|^2 [n_B(\omega_n) + 1] \times n_F(\epsilon_{\mathbf{k}}) [1 - n_F(\epsilon_{\mathbf{k}-\mathbf{q}})] \delta(\epsilon_{\mathbf{k}-\mathbf{q}} - \epsilon_{\mathbf{k}} + \omega_n) \quad (4)$$

is the golden-rule rate for an electron of momentum $\mathbf{k}$ to scatter to $\mathbf{k} - \mathbf{q}$ while emitting a phonon n , and

$$\Gamma_n^{\text{ab}}(\mathbf{k} \rightarrow \mathbf{k} + \mathbf{q}) = 2\pi |g_{n\mathbf{q}}|^2 n_B(\omega_n) \times n_F(\epsilon_{\mathbf{k}}) [1 - n_F(\epsilon_{\mathbf{k}+\mathbf{q}})] \delta(\epsilon_{\mathbf{k}+\mathbf{q}} - \epsilon_{\mathbf{k}} - \omega_n) \quad (5)$$

is the corresponding phonon absorption rate. n_B is the Bose distribution function with temperature T_{ph} and n_F is the Fermi distribution with temperature T_{el} . The factor of 2 in (3) accounts for spin degeneracy. It is possible to obtain an exact expression for P ; the result (suppressing factors of $\hbar$ and k_B) is

$$P = \frac{m^2 V_{\text{el}}^2}{8\pi^4} \sum_n \int_0^\infty d\omega \delta(\omega - \omega_n) \left(\frac{\omega}{e^{\omega/T_{\text{el}}} - 1} - \frac{\omega}{e^{\omega/T_{\text{ph}}} - 1} \right) \times \int d^3k \frac{|g_{n\mathbf{k}}|^2}{|\mathbf{k}|} \left[\omega + T_{\text{el}} \ln \left(\frac{1 + \exp[(\frac{m\omega^2}{2k^2} + \frac{k^2}{8m} - \frac{\omega}{2} - \mu)/T_{\text{el}}]}{1 + \exp[(\frac{m\omega^2}{2k^2} + \frac{k^2}{8m} + \frac{\omega}{2} - \mu)/T_{\text{el}}]} \right) \right].$$

The logarithmic term in P can be shown to be negligible in the temperature regime of interest and will be dropped. Carrying out the $\mathbf{k}$ integration then leads to

$$P = \frac{v_1^4 \Sigma V_{\text{el}}}{24 \zeta(5)} \int_0^{\omega_D} d\omega F(\omega) \left(\frac{\omega}{e^{\omega/T_{\text{el}}} - 1} - \frac{\omega}{e^{\omega/T_{\text{ph}}} - 1} \right), \quad (6)$$

where $F(\omega) \equiv \sum_n U_n \delta(\omega - \omega_n)$ is a strain-weighted vibrational DOS, with

$$U_n \equiv \frac{1}{V_{\text{el}}} \int_{V_{\text{el}}} d^3r d^3r' \frac{\nabla \cdot \mathbf{f}_n(\mathbf{r}) \nabla' \cdot \mathbf{f}_n^*(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|^2 + a^2}. \quad (7)$$

Here ω_D is the Debye frequency. U_n can be interpreted as an energy associated with mass-density fluctuations interacting via an inverse-square potential [11], cut off at distances of the order of the lattice constant a . We have reduced the calculation of P to the calculation of $F(\omega)$. Allen [12] has derived a related weighted-DOS formalism.

We now calculate $F(\omega)$ and P for a metal film of thickness d attached to the free surface of an isotropic elastic continuum with $L \rightarrow \infty$; see the inset to Fig. 1. For calculational simplicity, the film and substrate are assumed to have the same elastic parameters, characterized by a mass density ρ and bulk sound velocities v_t and v_l . Where material parameters are necessary we shall assume a Cu film; however, the qualitative behavior we obtain is generic. The evaluation of $F(\omega)$ requires the vibrational eigenfunctions for a semi-infinite substrate with a free surface, which have been obtained in the classic paper by Ezawa [13]. The modes are labeled by a branch index m , taking the five values SH, +, -, 0, and R, by a two-dimensional wavevector $\mathbf{K}$ in the plane defined by the surface, and by a parameter c with the dimensions of velocity that is continuous for all branches except the Rayleigh branch $m=R$. With the normalization convention of Ref. [13] we have

$$F(\omega) = \sum_{\mathbf{K}} U_{R\mathbf{K}} \delta(\omega - c_R K) + \sum_{m \neq R} \sum_{\mathbf{K}} \int dc U_{m\mathbf{K}c} \delta(\omega - cK). \quad (8)$$

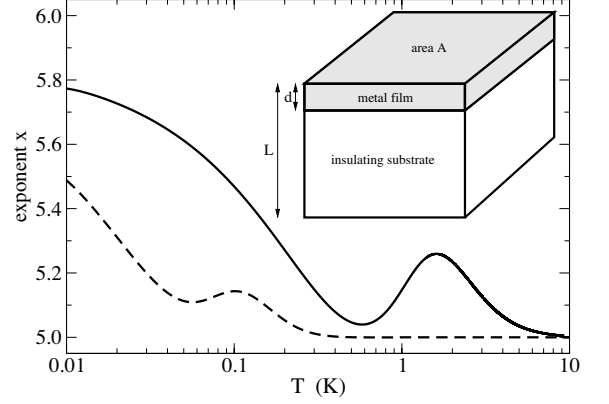


FIG. 1: (inset) Conducting film of thickness d attached to insulator. The top surface of the metal is stress-free. (main) Temperature dependence of the thermal power exponent x for a 10 nm (solid curve) and 100 nm (dashed curve) Cu film.

The range of the parameter c depends on the branch m , and is summarized in Table I. The frequency of mode $m\mathbf{K}c$ is cK .

m	range of c
SH	$[v_t, \infty]$
$\pm$	$[v_l, \infty]$
0	$[v_t, v_l]$
R	c_R (discrete)

TABLE I: Values of the parameter c for the five branches of vibrational modes of a semi-infinite substrate.

Turning to an evaluation of (8), the SH branch is purely transverse, so $U_{\text{SH}} = 0$. The normalized eigenmodes for the $\pm$ branches are

$$\mathbf{f}_{\pm} = \sqrt{\frac{K}{4\pi c A}} \left\{ \left[\mp \alpha^{-\frac{1}{2}} (e^{-i\alpha K z} - \zeta_{\pm} e^{i\alpha K z}) + i\beta^{\frac{1}{2}} \right. \right. \\ \times (e^{-i\beta K z} + \zeta_{\pm} e^{i\beta K z}) \Big] \mathbf{e}_{\mathbf{K}} + \left[\pm \alpha^{\frac{1}{2}} (e^{-i\alpha K z} + \zeta_{\pm} e^{i\alpha K z}) \right. \\ \left. \left. + i\beta^{-\frac{1}{2}} (e^{-i\beta K z} - \zeta_{\pm} e^{i\beta K z}) \right] \mathbf{e}_z \right\} e^{i\mathbf{K} \cdot \mathbf{r}}, \quad (9)$$

where $\alpha \equiv \sqrt{(c/v_l)^2 - 1}$ and $\beta \equiv \sqrt{(c/v_t)^2 - 1}$. Here

$$\zeta_{\pm} \equiv \frac{[(\beta^2 - 1) \pm 2i\sqrt{\alpha\beta}]^2}{(\beta^2 - 1)^2 + 4\alpha\beta}, \quad \text{with } |\zeta_{\pm}| = 1. \quad (10)$$

Then

$$\nabla \cdot \mathbf{f}_{\pm} = \mp i \frac{c^{\frac{3}{2}} K^{\frac{3}{2}}}{\sqrt{4\pi \alpha A} v_l^2} (e^{-i\alpha K z} - \zeta_{\pm} e^{i\alpha K z}) e^{i\mathbf{K} \cdot \mathbf{r}} \quad (11)$$

and $U_{\pm} = (c^3 K / \alpha v_1^4 V_{\text{el}}) I_{\pm}(Kd, c)$, where

$$I_{\pm}(Z, c) \equiv \text{Re} \int_0^Z dx dx' K_0(\sqrt{(x-x')^2 + a^2 Z^2 / d^2}) \times [e^{i\alpha(x-x')} - \zeta_{\pm} e^{i\alpha(x+x')}]$$

K_0 is a modified Bessel function. To obtain $U_{\pm}$ we use translational invariance in the xy plane to write (7) as

$$U_{m\mathbf{K}c} = \frac{A}{V_{\text{el}}} \int_0^d dz dz' \int_A d^2 R \times \frac{\nabla \cdot \mathbf{f}_{m\mathbf{K}c}(\mathbf{R}, z) \nabla' \cdot \mathbf{f}_{m\mathbf{K}c}^*(0, z')}{R^2 + (z - z')^2 + a^2}, \quad (12)$$

where $\mathbf{R} \equiv (x, y)$ is a two-dimensional coordinate vector. Then we scale out K , do the angular integration, and use the identity $\int_0^\infty dR R J_0(R) [R^2 + s^2]^{-1} = K_0(|s|)$, where J_0 is a Bessel function of the first kind.

Next we consider the $m = 0$ branch, for which

$$\mathbf{f}_0 = \sqrt{\frac{K}{2\pi\beta cA}} \left\{ \left[iC e^{-\gamma Kz} + i\beta e^{-i\beta Kz} + i\beta A e^{i\beta Kz} \right] \mathbf{e}_K + \left[-\gamma C e^{-\gamma Kz} + i e^{-i\beta Kz} - iA e^{i\beta Kz} \right] \mathbf{e}_z \right\} e^{i\mathbf{K} \cdot \mathbf{r}}, \quad (13)$$

where $\gamma \equiv \sqrt{1 - (c/v_1)^2}$,

$$A \equiv \frac{(\beta^2 - 1)^2 - 4i\beta\gamma}{(\beta^2 - 1)^2 + 4i\beta\gamma}, \quad \text{and} \quad C \equiv \frac{4\beta(\beta^2 - 1)}{(\beta^2 - 1)^2 + 4i\beta\gamma}.$$

Then

$$\nabla \cdot \mathbf{f}_0 = -\frac{c^{\frac{3}{2}} K^{\frac{3}{2}} C}{\sqrt{2\pi\beta A} v_1^2} e^{-\gamma Kz} e^{i\mathbf{K} \cdot \mathbf{r}} \quad (14)$$

and $U_0 = (|C|^2 c^3 K / \beta v_1^4 V_{\text{el}}) I_0(Kd, c)$, where

$$I_0(Z, c) \equiv \int_0^Z dx dx' K_0(\sqrt{(x-x')^2 + a^2 Z^2 / d^2}) e^{-\gamma(x+x')}.$$

Finally, for the Rayleigh branch,

$$\mathbf{f}_R = \sqrt{\frac{K}{\mathcal{K}A}} \left\{ \left[i e^{-\varphi Kz} - i \left(\frac{2\varphi\eta}{1+\eta^2} \right) e^{-\eta Kz} \right] \mathbf{e}_K - \left[\varphi e^{-\varphi Kz} - \left(\frac{2\varphi}{1+\eta^2} \right) e^{-\eta Kz} \right] \mathbf{e}_z \right\} e^{i\mathbf{K} \cdot \mathbf{r}}, \quad (15)$$

where $\varphi \equiv \sqrt{1 - (c_R/v_1)^2}$, $\eta \equiv \sqrt{1 - (c_R/v_t)^2}$, and $\mathcal{K} \equiv (\varphi - \eta)(\varphi - \eta + 2\varphi\eta^2)/2\varphi\eta^2$. c_R is the velocity of the Rayleigh surface waves, given by $c_R = \xi v_t$, where ξ is the root between 0 and 1 of $\xi^6 - 8\xi^4 + 8(3 - 2\nu^2)\xi^2 - 16(1 - \nu^2)$, with $\nu \equiv v_t/v_1$. For Cu, $\nu = 0.52$ and $\xi = 0.93$; hence $c_R = 2.4 \times 10^5 \text{ cm s}^{-1}$. Using (15),

$$\nabla \cdot \mathbf{f}_R = \frac{K^{\frac{3}{2}}(\varphi^2 - 1)}{\sqrt{\mathcal{K}A}} e^{i\mathbf{K} \cdot \mathbf{r}} e^{-\varphi Kz} \quad (16)$$

and $U_R = (2\pi c_R^4 K / \mathcal{K} v_1^4 V_{\text{el}}) I_R(Kd)$, where

$$I_R(Z) \equiv \int_0^Z dx dx' K_0(\sqrt{(x-x')^2 + a^2 Z^2 / d^2}) e^{-\varphi(x+x')}.$$

The final summations in (8) are carried out with the aid of the identity $\lim_{A \rightarrow \infty} \sum_{\mathbf{K}} \delta(\omega - cK) = \omega A / 2\pi c^2$ and elsewhere replacing K with ω/c . Then we obtain

$$F(\omega) = \frac{\omega^2}{v_1^4 d} \left\{ \frac{c_R}{\mathcal{K}} I_R\left(\frac{\omega d}{c_R}\right) + \int_{v_t}^{v_1} dc \frac{|C|^2}{2\pi\beta} I_0\left(\frac{\omega d}{c}\right) + \int_{v_1}^{\infty} dc \frac{1}{2\pi\alpha} [I_+(\frac{\omega d}{c}, c) + I_-(\frac{\omega d}{c}, c)] \right\}. \quad (17)$$

This expression, combined with (6), is our principal result. Evaluation of (17) can be further simplified by the use of the powerful identities

$$I_{\pm}(Z, c) = \text{Re} \left[\left(2Z - \frac{i\zeta_{\pm}}{\alpha} \right) f(Z, \alpha) + \frac{i\zeta_{\pm}}{\alpha} e^{2i\alpha Z} f^*(Z, \alpha) + 2i \left(\frac{\partial f(Z, s)}{\partial s} \right)_{s=\alpha} \right], \quad (18)$$

$$I_0(Z, c) = \frac{1}{\gamma} f(Z, i\gamma) - \frac{e^{-2\gamma Z}}{\gamma} f(Z, -i\gamma), \quad (19)$$

$$I_R(Z, c) = \frac{1}{\varphi} f(Z, i\varphi) - \frac{e^{-2\varphi Z}}{\varphi} f(Z, -i\varphi), \quad (20)$$

where $f(Z, s) \equiv \int_0^Z dx K_0(\sqrt{x^2 + a^2 Z^2 / d^2}) e^{isx}$, thereby reducing the I_m to a single one-dimensional integral f .

The I_m have distinct large- and small- Z character, crossing over near $Z = 1$. Because of the integration over c in (17), F and P accordingly exhibit a broad crossover behavior. However, once $\omega d < c_R$, all branches will have assumed their low-frequency forms. We define a crossover temperature

$$T^* \equiv \hbar c_R / k_B d \quad (21)$$

dividing regimes determined by the small and large $\omega d / c_R$ behavior of F . In the large $\omega d / c_R$ limit the $m = \pm$ modes in (17) can be shown to be dominant, and $\lim_{\omega d \rightarrow \infty} \int_{v_1}^{\infty} dc \frac{1}{\alpha} I_{\pm}(\frac{\omega d}{c}, c) = \pi \omega d$. Therefore, we obtain $F(\omega) \rightarrow F_{\text{bulk}}(\omega) \equiv \omega^3 / v_1^4$, independent of d , leading to a high-temperature behavior $P \rightarrow \Sigma V_{\text{el}} [\Phi(\omega_D / T_{\text{el}}) T_{\text{el}}^5 - \Phi(\omega_D / T_{\text{ph}}) T_{\text{ph}}^5]$, where Σ is the coefficient (2), and where $\Phi(y) \equiv [4! \zeta(5)]^{-1} \int_0^y dx x^4 / (e^x - 1)$. $\Phi(10)$ is about 0.97, and $\Phi(y)$ rapidly approaches 1 beyond that. Thus, at temperatures above T^* but sufficiently smaller than the Debye temperature, the Φ factors are equal to unity, and we recover the bulk result (1).

The low temperature asymptotic analysis is somewhat complicated and will be presented elsewhere. Briefly, using the small Z expansion

$$f(Z, s) \rightarrow -Z \ln Z + (1 + \ln 2 + \psi(1))Z - \frac{is}{2} Z^2 \ln Z + \frac{is}{2} \left(\frac{1}{2} + \ln 2 + \psi(1) \right) Z^2 + O(Z^3 \ln Z), \quad (22)$$

where ψ is the Euler polygamma function, we find $F(\omega) \rightarrow F_{\text{bulk}}(\omega) \times [-\lambda(\frac{\omega d}{c_R}) \ln(\frac{\omega d}{c_R}) + O(\frac{\omega d}{c_R})]$ in the small $\omega d/c_R$ limit. Here

$$\lambda \equiv \frac{1}{\mathcal{K}} + \int_{v_t}^{v_1} dc \frac{c_R |C|^2}{2\pi c^2 \beta} + \int_{v_1}^{\infty} dc \frac{c_R [2 - \text{Re}(\xi_+ + \xi_-)]}{2\pi c^2 \alpha}$$

is a constant determined by v_1 , v_t , and c_R . Each T^5 function in (1) therefore crosses over at low temperature as $T^5 \rightarrow -\Lambda(\frac{T^6}{T^*}) \ln(\frac{T}{T^*})$, with $\Lambda = \lambda \pi^6 / 189 \zeta(5)$. For a Cu film, $\lambda \approx 0.815$ and $\Lambda \approx 3.998$. There are also mixed-temperature regimes possible, where only one of the two terms in (1) has crossed over.

The most striking consequence of the crossover is that the temperature exponent increases. In Fig. 1 we fit P (with either T_{el} or T_{ph} zero) to a power-law T^x with a temperature dependent exponent x , and plot the exponent for 10 nm ($T^* = 1.84$ K) and 100 nm ($T^* = 184$ mK) Cu films. $x(T)$ is nonmonotonic, displaying a pronounced maximum near T^* , and drifts upward as $T \rightarrow 0$. Such behavior has not (to the best of our knowledge) been observed, even though many experiments [2, 4, 5, 7] have achieved $T \ll T^*$. The physical origin of the crossover is that, at low temperature, the stress-free condition at the metal surface penetrates into the film, reducing the strain and hence electron-phonon coupling there. The characteristic distance over which the boundary condition has an effect is of the order of a bulk wavelength. When $T \gg T^*$, only a thin outer surface layer of the film has a significantly diminished strain, and bulk behavior is expected. However, when $T \ll T^*$ the entire metal film experiences a reduced strain.

The experiments of Refs. [4] and [5], both using Cu films, observe an approximate T^5 dependence even well below T^* . It is therefore interesting to compare the observed *prefactors* with the coefficient Σ , evaluated for Cu. Using a free-electron gas approximation [14] and measured elastic properties [15], we obtain $5.97 \times 10^7 \text{ W m}^{-3} \text{ K}^{-5}$, which is at least an order of magnitude smaller than observed, consistent with our assertion that there is some unidentified mechanism *enhancing* the thermal coupling. Noble metals are far from free-electron systems because of their complex Fermi surfaces. We attempt to address this shortcoming by regarding the “Fermi surface” quantities $N_{\text{el}}(\epsilon_F)$ and v_F as independently adjustable parameters, to be obtained empirically from heat capacity and cyclotron resonance data. Carrying out this analysis, the details of which will be presented elsewhere, leads to the modified prefactor $\Sigma = 1.14 \times 10^8 \text{ W m}^{-3} \text{ K}^{-5}$, which is still considerably smaller than measured.

Although not included in the model considered here, disorder in a bulk metal film is expected to produce a crossover from the T^5 dependence to a T^6 scaling when the phonon elastic mean free path ℓ becomes smaller than the thermal wavelength [16, 17], a behavior which has

not been reported experimentally until very recently [18]. Thus, the crossover predicted here should not be appreciable affected by disorder unless $\ell < d$. Although thin films are known to scatter phonons strongly, measured values of ℓ are still much larger than d in the temperature regime of interest here [19].

In conclusion, we argue that a wide variety of experiments contradict the predictions of an essentially exact application of the standard model of electron-phonon thermal coupling in metals to a supported-film geometry, suggesting a widespread breakdown of that model. ANC was supported by the NASA Office of Space Science under grant NAG5-8669, and by the Army Research Office under DAAD-19-99-1-0226. MRG was supported by the National Science Foundation under grants DMR-0093217 and CMS-040403.

-
- [1] V. F. Gantmakher, Rep. Prog. Phys. **37**, 317 (1974).
 - [2] F. C. Wellstood, C. Urbina, and J. Clarke, Phys. Rev. B **49**, 5942 (1994).
 - [3] W. A. Little, Can. J. Phys. **37**, 334 (1959).
 - [4] M. L. Roukes, M. R. Freeman, R. S. Germain, R. C. Richardson, and M. B. Ketchen, Phys. Rev. Lett. **55**, 422 (1985).
 - [5] C. S. Yung, D. R. Schmidt, and A. N. Cleland, Appl. Phys. Lett. **81**, 31 (2002).
 - [6] J. Liu and N. Giordano, Phys. Rev. B **43**, 3928 (1991).
 - [7] J. F. DiTusa, K. Lin, M. Park, M. S. Isaacson, and J. M. Parpia, Phys. Rev. Lett. **68**, 1156 (1992).
 - [8] M. L. Roukes, Physica B **263**, 1 (1999).
 - [9] K. Schwab, E. A. Henriksen, J. M. Worlock, and M. L. Roukes, Nature (London) **404**, 974 (2000).
 - [10] D. R. Schmidt, R. J. Schoelkopf, and A. N. Cleland, Phys. Rev. Lett. **93**, 45901 (2004).
 - [11] Recall that, in elasticity theory, the mass-density fluctuation $\delta\rho$ is given by $-\rho \nabla \cdot \mathbf{u}$.
 - [12] P. B. Allen, Phys. Rev. Lett. **59**, 1460 (1987).
 - [13] H. Ezawa, Ann. Phys. (N.Y.) **67**, 438 (1971).
 - [14] In the free-electron gas approximation, the Fermi energy of Cu is 7.03 eV, the DOS at ϵ_F is $1.13 \times 10^{34} \text{ erg}^{-1} \text{ cm}^{-3}$, and v_F is $1.57 \times 10^8 \text{ cm s}^{-1}$.
 - [15] Cu has the low-temperature elastic constants $c_{11} = 1.76 \times 10^{12} \text{ dyne cm}^{-2}$, $c_{12} = 1.25 \times 10^{12} \text{ dyne cm}^{-2}$, and $c_{44} = 8.18 \times 10^{11} \text{ dyne cm}^{-2}$ [20], and its mass density is $\rho = 8.94 \text{ g cm}^{-3}$. To approximate a cubic material as an isotropic elastic continuum we define effective elastic constants $C_{11} \equiv c_{11} - 2\Delta$ and $C_{44} \equiv c_{44} + \Delta$, where $\Delta \equiv (c_{11} - c_{12} - 2c_{44})/5$, and we let $v_1 = (C_{11}/\rho)^{1/2}$ and $v_t = (C_{44}/\rho)^{1/2}$. This leads to $v_1 = 4.97 \times 10^5 \text{ cm s}^{-1}$.
 - [16] B. Keck and A. Schmid, J. Low. Temp. Phys. **24**, 611 (1976).
 - [17] J. Rammer and A. Schmid, Phys. Rev. B **34**, 1352 (1986).
 - [18] I. J. Maasilta, J. T. Karvonen, J. M. Kivioja, and L. J. Taskinen, e-print cond-mat/0311031.
 - [19] T. Klitsner and R. O. Pohl, Phys. Rev. B **36**, 6551 (1987).
 - [20] W. C. Overton and J. Gaffney, Phys. Rev. **98**, 969 (1955).